


Casaq II INTEGRATED AMPLIFIER

Casaq II Getting back to the roots. Everything that could have been complicated or confusing has disappeared, leaving only pure entertainment. This integrated amplifier stands out for its simplicity and essential lines, as well as excellent audio reproduction.

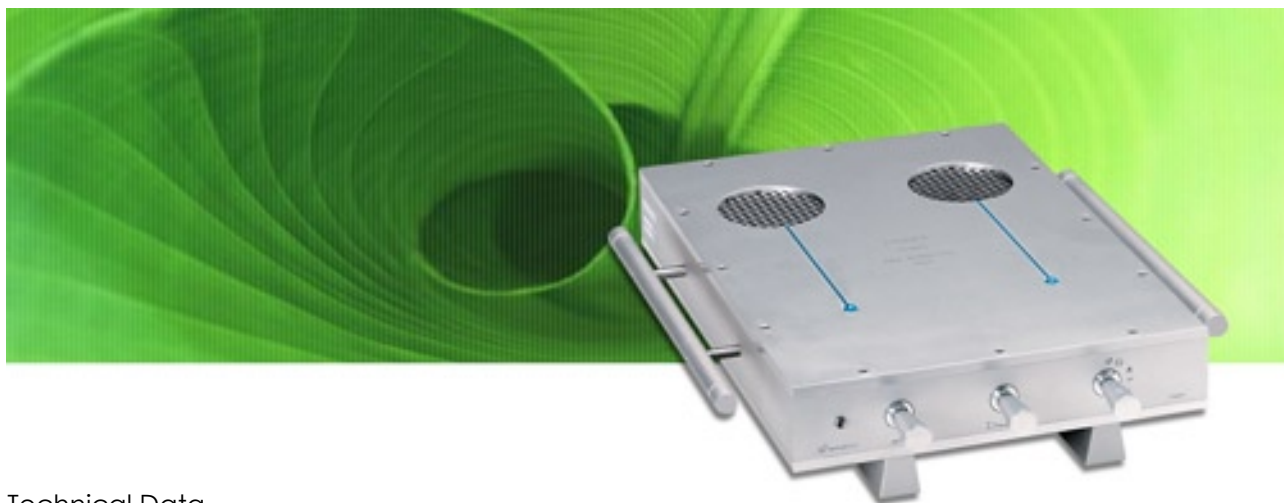

Technical Data

Type:	Solid State
Configuration:	Symmetrical in A/B class
Frequency response:	DC - 35 Mhz
Total harmonic distortion:	< 0,05% 20 Hz - 20 kHz
IM distortion:	< 0,05%
Input impedance:	100 kOhms in parallel with 11 pf
Input impedance phono:	47 kOhms
Sensitivity:	Phono MM 3mV others 10 vrms in - for 21 wrms
Power output:	21 watts rms per channel into 8 Ohms
Signal to noise:	90 DBV unweighed input shorted
Dumping factor:	> 500

Inputs:	1 cd, 1 aux/video, 1 tuner, 1 tape, 1 phono via optional card MM or MC
Outputs:	1 tape, loudspeaker set for biwiring
Rated power consumption:	100 W
Rated mains frequency:	50 - 60 Hz
Weigth:	11 kg (24 lbs)
Dimensions:	H: 9 cm (3 1/2") W: 30 cm (12") D: 42 cm (16 1/2")
Special features:	Close tolerance controls, Handcrafted aeronautical aluminium chassis, High purity gold connectors, Designed by Enrico Lusuardi